

Product Description:

The DORADO Series is a full cutoff LED Wallpack that is suitable for outdoor and wet location. This luminaire has over 100,000 calculated life hours and is highly resistant to shock and re-strike. This fixture has been nationally lab tested in accordance with IES standards and has instant-on and instant-restrike performance.

Features:

- **Application:** LED Wall Pack
- **Installation:** Junction Box / Conduit
- **Warranty:** 5 Years
- **Lens:** Shatter Proof Glass
- **LED Source:** LUXEON 3030 2D
- **Operating Temperature:** -13°F ~ 122°F
- **Lens:** Polycarbonate lens and tempered glass
- **Power Factor:** >0.9
- **Housing Material:** Heavy-duty die-cast aluminum housing and door, fully gasket sealed to be dirt and bug proof



Technical Data:

Certifications	UL
CRI	≥ 82
IP Rating	IP65
CCT	3000K
Input Voltage	120-277V




Specifications:

Fixture Model	Total Lumens	Efficacy (lm/w)	Weight (lbs)	Dimensions (inches)	Input Voltage	Beam Angle
DORADO-45W	4,900 lm	>110 lm/W	12.1	14.21 x 8.78 x 9.25	120-277W	T3

Photometrics:

DORADO-45W

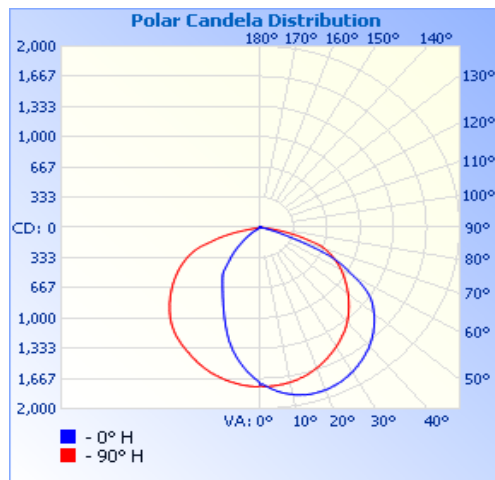

Illuminance at a Distance

	Center Beam fc	Beam Width	
9.7ft	18.5 fc	17.9 ft	38.2 ft
19.3ft	4.67 fc	35.7 ft	76.0 ft
29.0ft	2.07 fc	53.6 ft	114.2 ft
38.7ft	1.16 fc	71.5 ft	152.4 ft
48.3ft	0.75 fc	89.2 ft	190.3 ft
58.0ft	0.52 fc	107.2 ft	228.5 ft

■ Vert. Spread: 85.5°
■ Horiz. Spread: 126.2°

Ordering Guide:

