ALL GREEN LIGHTING, INC.

UFO-G2 Series

Product Description:

The UFO-G2 series is the 2nd generation of our UFO highbay fixture. The UFO-G2 has been upgraded to produce a higher, more efficient lumen output and has a variety of accessories available, making the UFO-G2 an ideal solution to most LED lighting needs. The UFO-G2 is also a great value; providing affordable pricing without sacrificing quality. Be sure to contact a member of our sales team for details!

Features:

- **Application:** LED High Bay
- **Mounting:** Hanging Ring**,** Pendant, Wall, Hook
- **Warranty:** 5 Years
- **LED Source:** Osram/Lumileds 3030
- **Operating Temperature:** -40˚F ~ 131˚F
- **Power Factor:** >0.90

Technical Data:

Certifications	ETL
CRI	≥ 70 (80 available)
IP Rating	IP65
CCT	3000K ~5700K
Input Voltage	90-305V (347-480V optional)

Mounting Options:

Hanging Ring

Hanging Ring with 304-Stainless Steel Hook

Wall Mount

Yoke

Pendant Mount (1/2" or 3/4" NPT)

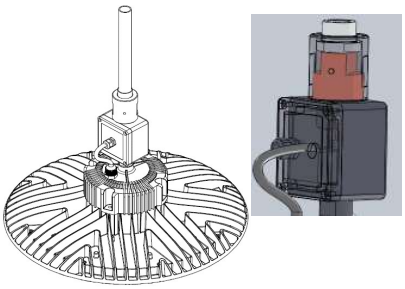

Specifications:

Standard Lumen Option:

Fixture Model	Beam Angle	Total Lumens (5000K)	Efficacy LPW	Dimension (Diameter x Height)	Weight (lbs)
UFO-70W-G2	60º	11,930	170	Φ 11.02" x 6.25"	5.72
	90º	11,856	169		
	120º	12,089	173		
UFO-90W-G2	60º	15,488	172		
	90º	15,403	171		
	120º	15,654	174		
UFO-120W-G2	60º	20,186	168	Φ 13.3" x 6.53"	8.14
	90º	20,262	169		
	120º	20,459	170		
UFO-150W-G2	60º	24,900	166		
	90º	24,876	166		
	120º	25,752	172		
UFO-200W-G2	60º	32,172	161	Φ 15.7" x 6.57"	10.12
	90º	31,981	160		
	120º	32,388	162		
UFO-300W-G2	60º	50,220	167	Φ 18.1" x 7.75"	12.54
	90º	N/A	N/A		
	120º	50,237	167		

High Lumen Option:

Fixture Model	Beam Angle	Total Lumens (5000K)	Efficacy LPW	Dimension (Diameter x Height)	Weight (lbs)
UFO-70W-G2H	120º only	12,791	183	Φ 11.02" x 6.25"	5.72
UFO-90W-G2H		16,664	185		
UFO-120W-G2H		21,779	181	Φ 13.3" x 6.53"	8.14
UFO-150W-G2H		27,382	183		
UFO-200W-G2H		34,438	172	Φ 15.7" x 6.57"	10.12
UFO-300W-G2H		53,117	177	Φ 18.1" x 7.75"	12.54

Dimensions:

70W & 90W

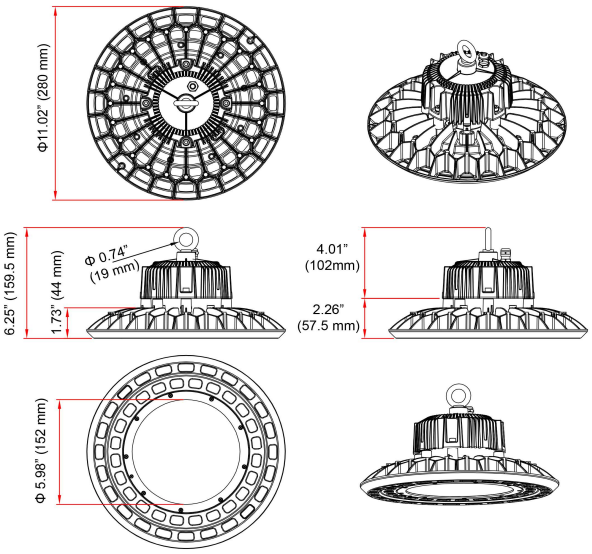

120W & 150W

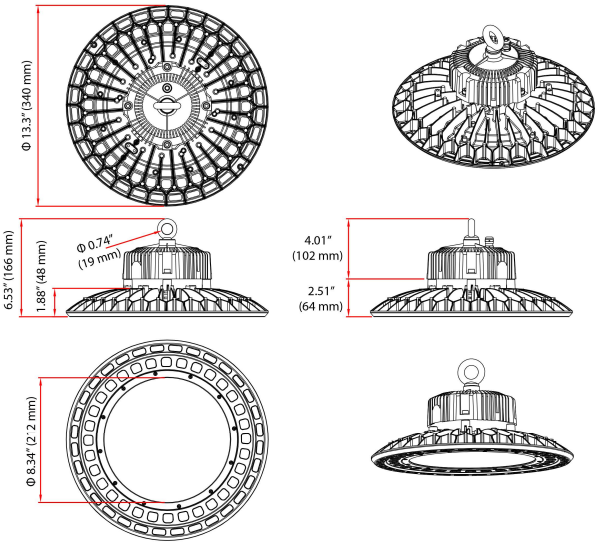

200W

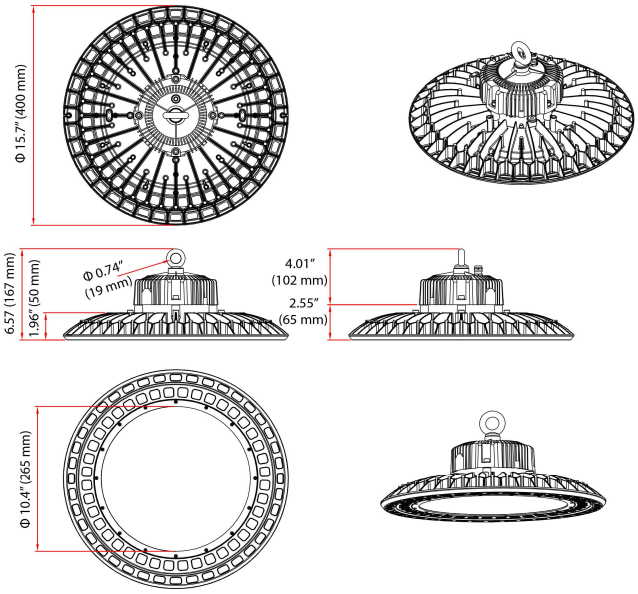

300W

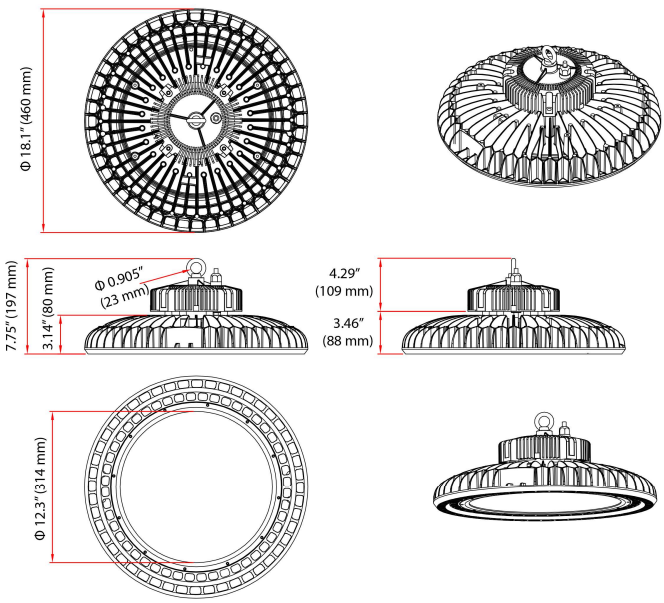

Photometrics:

UFO-150W-G2-50K-120º

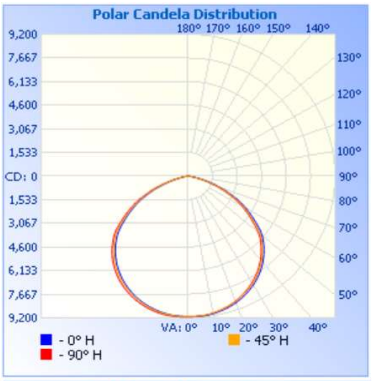

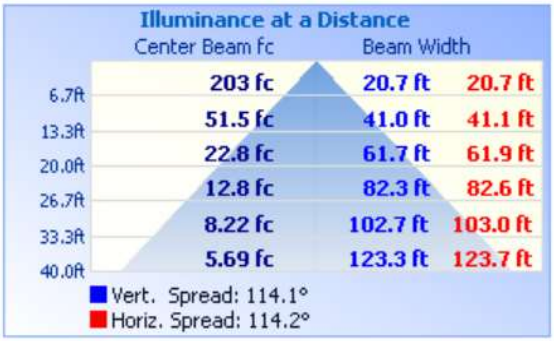

UFO-300W-G2-50K-120º

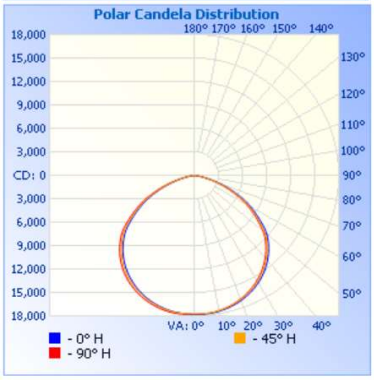

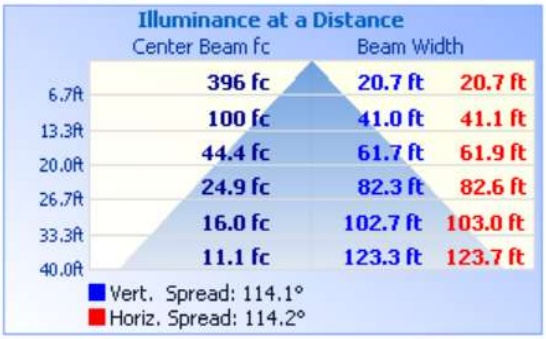

Accessories:

Emergency Backup Battery



10W for 3 hours

100-280VAC

Standard: IP40

IP65 housing available (remote install)

IP65 EM Housing:

Polycarbonate Dome

Ordering Guide:

UFO-150W G2	90-	HR	50K	120°	BL	

Model:
Standard Lumen:
UFO-70W-G2
UFO-90W-G2
UFO-120W-G2
UFO-150W-G2
UFO-200W-G2
UFO-300W-G2

High Lumen (120º):
UFO-70W-G2H
UFO-90W-G2H
UFO-120W-G2H
UFO-150W-G2H
UFO-200W-G2H
UFO-300W-G2H

Voltage:
90-305V
347-480V

Mounting:
HR: Hanging Ring

304HK: Hanging Ring + 304 Stainless Steel Hook

PM: Pendant

YM: Yoke

WM: Wall

CCT:
30K
40K
50K
57K

Beam Angle:
60°
90°
120°

Color:
BL: Black
WH: White

Optional Accesssories:
DM: 0-10V Dimming
MS: Motion Sensor
WG: Wire Guard
AL: Aluminum Reflector
UL: Up-Light LED Strip
FR: Frosted Lens
PCD: Polycarbonate Dome
EMIP40: IP40 Emergency Back up Battery
EMIP65: IP65 Remote Emergency Back up Battery